

EFFICIENT LINE



MINI SILENT 150



Contact

Small, quiet and powerful

Coltri's breathing air compressors of the **MINI SILENT** series, equipped with 150 l/min pumping unit MCH 9, are characterized by extreme silence, obtained without sacrificing performance. The large space offered by the frame allows the use of a filtering system with Maxifilter. These compressors are available with single-phase or three-phase electric motor and integrated control panel with hour meter, they have automatic condensate drain and autostop as standard. The equipment includes a filling connection for flexible hose with working pressure from 232 to 330 bar.

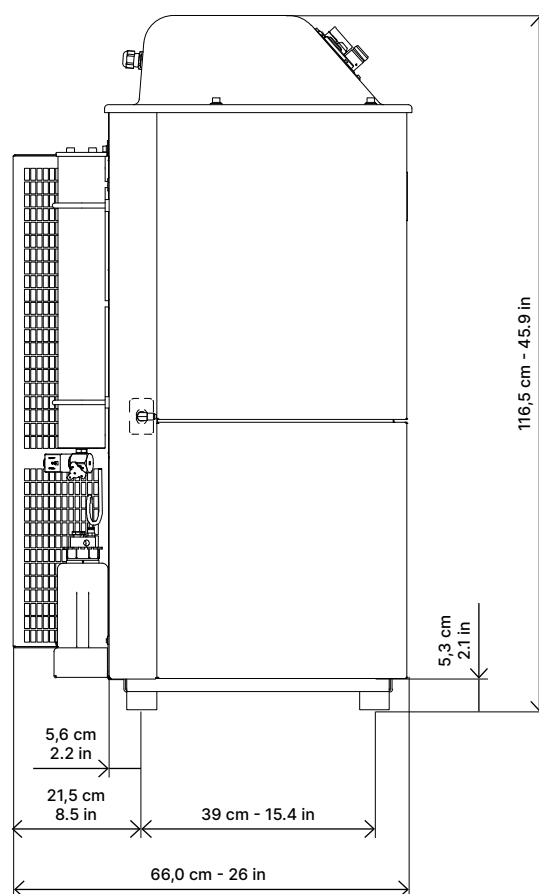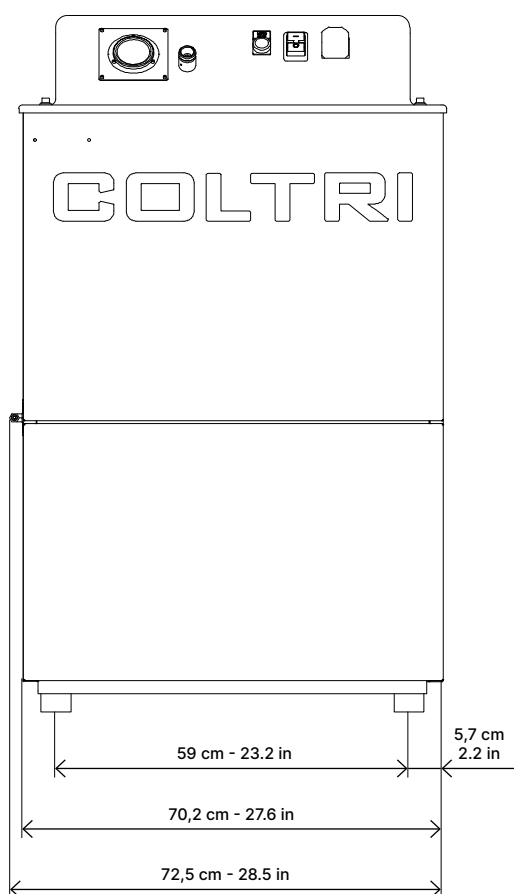

Technical data

Type of gas	Breathing air EN 12021
Intake pressure	Atmospheric / max 300 millibar
Working pressure	232 bar / 300 bar / 330 bar
Max working pressure	330 bar
Permissible ambient temperature range	-10° C ÷ +40° C
Permissible altitude	0 ÷ 1.500 m SLM
Max permissible tilt	6°
Oil	Synthetic Coltri Oil ST 755
Oil change interval	1 year / 1.000 h
Frame	Steel - Colour Blue RAL 5015 - Powder coating painting - Scratch proof

Compressor

	150 EM	150 ET
Charging rate Measured during 10 liters cylinder filling from 0-200 bar tolerance +/- 5% at + 20 ° C ambient temperature.	150 l/min 9 m³/h 5.3 cfm	
Purification System	Maxifilter	
Cooling air flow	1.684 m³/h	
Weight¹	120 kg - 264.6 lb	
Dimensions (W x D x H)¹	71,5 × 67 × 110 - 28.1 × 26.4 × 43.3 in	

¹ Standard model. Dimensions and wieight may vary depending on accessories.


Electric motor

	150 EM	150 ET	
Type	Single-phase electric	Three-phase electric	
Power	4 kW - 5.5 Hp		
Operating voltage/frequency Different voltage / frequency available on request.	220 V, 60 Hz	400 V, 50 Hz	440 V, 60 Hz
Rated current	18 A	8,7 A	
Speed (RPM)	3.450	2.840	3.410
Protection class	IP55		

The IP55 protection class, compliant with IEC 60034-5, guarantees protection against dust deposits and water jets from any direction.

Technical data pumping unit MCH 9

	150 EM	150 ET
Charging rate Measured during 10 liters cylinder filling from 0-200 bar tolerance +/- 5% at + 20 ° C ambient temperature.	150 l/min 9 m³/h 5.3 cfm	
Speed (RPM)	1.240	
Number of stages	3	
Number of cylinders	3	
Cylinder bore 1st stage	70 mm	
Cylinder bore 2nd stage	38 mm	
Cylinder bore 3rd stage	14 mm	
Stroke	40 mm	
Direction of rotation (from flywheel side)	Counter clockwise (left)	
Drive type	V-belt A type	
Intermediate pressure 1st stage	~ 6 bar	
Intermediate pressure 2nd stage	~ 45 bar	
Oil sump capacity	1,8 liters	
Max intake pressure	1,3 bar (absolute) / 300 millibar - 4,35 psi	

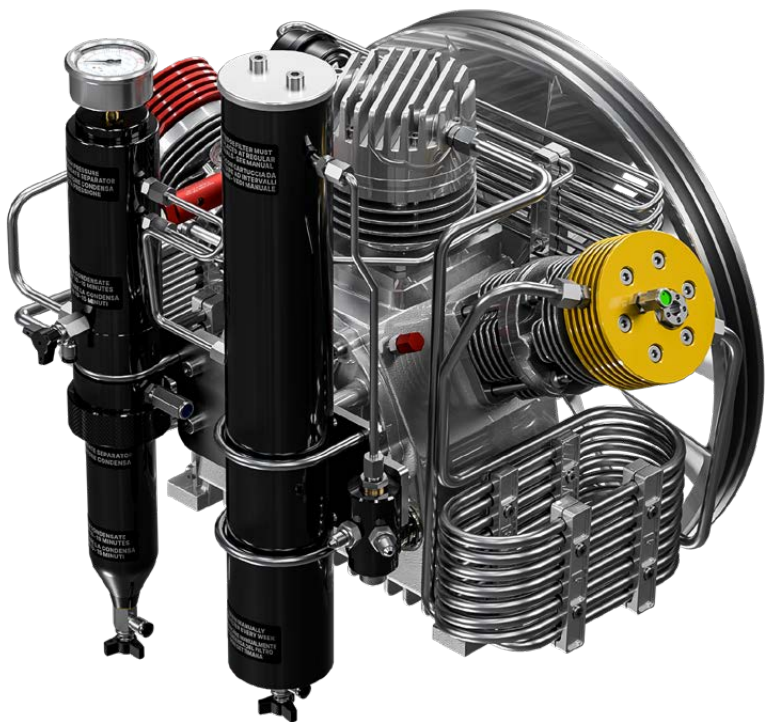





Splash lubrication with conrod pin immersed in oil




Suction filter: 10 µm



Pipes, fitting and nuts in stainless steel AISI 316



Intermediate condensate separator after the second stage



High pressure final condensate separator



Safety valves after each stage of compression




Die-cast aluminium cylinders with barrel coating in nicasil



Forged aluminum connecting rods




Forged steel crankshaft




Stainless steel second and third stage valves



Roller Bearings for intensive work load



Third stage in tempered steel with 5 piston rings in special cast iron



Second and third stage with pushing pistons to eliminate lateral forces on the pistons



CE certification

Standard equipment

Purification system Maxifilter

MAXIFILTER cartridge repackable or disposable



Purification system	Maxifilter
Operating pressure (Standard)	250 bar / 330 bar / 360 bar
Operating pressure max. (PS)	420 bar
Processable air capacity (air inlet temperature in the filter 20° C at 300 bar) ¹	890 m ³

¹ When using a filter cartridge without HOPCALITE CO CATALYST.
If a cartridge with CO removal is used, the process air capacity is reduced by about 20%.

Condensate separation system

- Interstage separator after 2nd stage
- Final separator for the removal of oil/water condensate
- Final safety valve, fitted to separator housing
- Pressure maintaining/non return valve



Contamination	Maximum content as per DIN EN 12021:2014	Air quality*
H ₂ O	25 mg/m	≤ 10 mg/m
CO	5 ppm(v)	≤ 4
CO ₂	500 ppm(v)	≤ 500
Oil	0,5 mg/m	≤ 0,5 mg/m

- * Measured at our facility using ASCO HORA 160 ANALYZER.
- Only with special filter cartridge with HOPCALITE CO CATALYST. and up to a maximum concentration of 25 ppm CO in intake air. The compressed clean breathing air then contains a maximum of 5 ppm CO.
 - The level of CO₂ in the intake air must not exceed the maximum level of CO₂ as per EN 12021:2014.
 - Reported values exceed standards:
 - ISO 8573-1 class 3 for particles
 - ISO 8573-1 class 1 for humidity
 - ISO 8573-1 class 1 for oil.



Autostop



Automatic condensate drain



Soundproof frame



Filling connection






2 Filling connection to choose from: DRV DIN 232 bar, INT/YOKE DRV 232 bar and DRV DIN 300 bar.

Optional



C-Monitor

Application fields



Aerotecnica Coltri S.p.A.

Via dei Colli Storici, 177
25015 Desenzano del Garda - Brescia - Italy

Tel. +39 030 9910301
+39 030 9910297

info@coltri.com



Printed on paper from
sustainably managed forests



coltri.com

Visit our
showroom in
Virtual Reality



coltri.com/showroom



COLTRI®
COMPRESSORS